

Roof windows

Deck-mounted - GPU/GGU/GXU/GDL CABRIO™

Fifth Wall Design Tip

keep natural light and
fresh air within reach
with roof windows



Special order blinds
















Room darkening - double-pleated blinds

Manual

Authentics		Basics		Dynamics	
					
1049 Golden beige	1159 Brown	1156 Blue	1051 Raspberry	1162 Cherise	1160 Yellow
Dynamics					
					
1161 Orange					

Light filtering - single-pleated blinds

Manual

Lights			Naturals		Shadows	
						
1255 Snowy white	1256 Classic white	1257 Wavy white	1258 Delightful cream	1262 Infinite grey	1263 Metallic gold	
Shadows		Masters			Blossoms	
						
1265 Metallic blue	1266 Luscious lime	1267 Burned orange	1268 Delightful blue	1269 Classic red	1270 Sunny stripes	
Blossoms						
						
1271 Sunny yellow	1272 Sunny blue	1273 Sunny orange				

Blackout blinds-flat

Manual

Essentials					
					
1025 White	4555 Pale blue	1085 Beige	4556 Beige	1705 Light grey	4558 Essential pattern
Darks					
					
4559 Dark brown	1100 Blue	4560 Dark red	2055 Blue	4561 Dark purple	4562 Dark pattern


Blackout blinds-flat (cont.)

Manual

Vegetals



Graphics

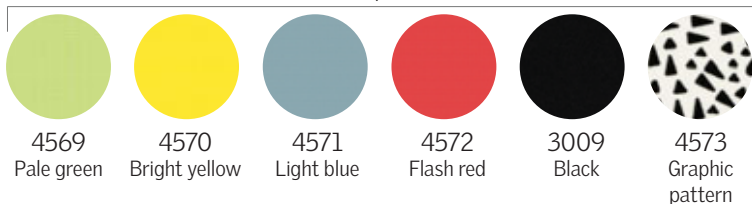

Light filtering blinds-flat

Manual

Minimalists




Romantics



Romantics



Constructivists




Constructivists




Venetian blinds

Manual only


Barn




Factory

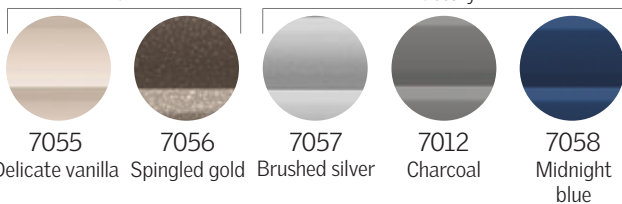

Club



Club




Note: Special order blinds ship separately from your skylight. Please allow 2 weeks for delivery.



Natural ventilation with a closed window

Let fresh air into your home without having to worry about security or bad weather, even when you are away or sleeping. Pull the unique top control bar once and you will allow fresh, filtered air to enter through the ventilation flap.

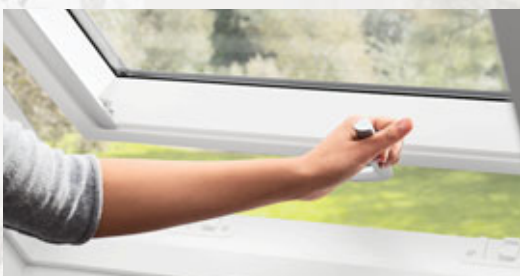

White Polyurethane

Perfect for contemporary interiors and white ceilings. The polyurethane molding has no visible joints, and therefore ensures a moisture resistant finish that requires less maintenance than lacquered natural pine.



More access to the outdoors

All of our roof windows make it easier to gain access to the outdoors.



Roof windows

Roof access window - GXU



Roof access window - GXU

Benefits:

- Easy roof access for repairs, maintenance, emergency, and egress (FK06).
- Locking device keeps sash in open position.
- Slim sash and frame appearance.
- Ventilation flap.
- Can be installed as a left-hinged or right-hinged roof access window.
- Pre-installed Pick&Click!™ brackets for easy blind installation.



Size code GXU



Rough opening

(W-in. x H-in.)

CK06

22 1/8 x 46 7/8

FK06

26 1/2 x 46 7/8



Balcony roof window

Deck-mounted - GDL CABRIO™



Balcony roof window - GDL CABRIO™

Benefits:

- Dual-sash operation.
- Features a select wood frame with a clear finish sash coating and exterior aluminum.



PK19

Rough opening

(W-in. x H-in.)

39 3/8 x 101



**Fifth Wall
Design Tip**

transform attics with
a private balcony

10-year installation warranty

Deck-mounted - 3 layers of protection



1 Deck seal

The pre-attached deck seal on all deck-mounted skylights provides a seal between the frame and roof deck for a leak-proof installation.

2 Adhesive underlayment

Adhesive underlayment for secondary water protection against the harshest weather conditions.

3 Flashing ← *VELUX flashing must be purchased in order to qualify for the 10-year installation warranty.*


Engineered flashing for easy installation and primary water protection.

For complete information visit thenoleakskylight.com.

The No Leak Skylight

• No Leak Promise • No Worries

Curb-mounted - 3 layers of protection



1 Pre-attached gasket

A pre-attached skylight gasket provides a seal between a standard site-built curb and the skylight that caps off a leak-proof installation for curb-mounted skylights.

2 Adhesive underlayment

Adhesive underlayment for secondary water protection against the harshest weather conditions for standard site-built curbs.

3 Flashing ← *ECL shingle or ECW tile flashing must be purchased in order to qualify for the 10-year installation warranty.*

Engineered flashing for easy installation and primary water protection.

For complete information visit thenoleakskylight.com.

Deck-mounted flashing systems

Flashing must be purchased with skylights and installed properly to benefit from the No Leak warranty

Adhesive underlayment included in flashing kit



Shingles/shakes - EDL


- Step flashing pieces interweave with roofing material for proper water drainage.
- Additional step pieces (ZZZ 200) are required for shakes and other thick roofing materials.



Combi applications*

- Type EKL works with groupings on low-profile roofing materials such as shingles and shakes.
- Type EKW works with groupings on high-profile roofing materials such as Spanish tile or corrugated metal roofing.


Note: VSS only available for side-by-side applications. (EKL only)



Tile roofing - EDW


- Patented-sill flashing features pliable pleats that form to most types of tile.
- Side and head flashing pieces form a gutter to direct water away from the skylight.

Note: Not available for VSS




Metal roofing - EDM

- Flashing pieces interlock with roofing material for a fast weather tight installation.
- Sill apron features pliable pleats that form to the roof.



Copper cladding and flashing

- Available for select deck-mounted VELUX roof windows and skylights.
- Copper products are special order items and require varying lead-times. Call for more information.



Bi-pack flashing - ECB

- Used with site-built curb on low-sloped roofs.
- No bending of flashing required.
- Applied to 2-in. x 4-in. lumber and plywood.
- Download curb construction guidelines at: veluxusa.com

**EKL applications require 4-in. over-and-under spacing and 2.5-in. - 12-in. side-by-side spacing in ½-in. increments.*

EKW applications require 4-in. side-by-side.

Roof window combi application is available as a special order with varying lead-times. 4-in. spacing is required for both over-and-under and side-by-side spacing.

Curb-mounted flashing systems

Flashing must be purchased with skylights and installed properly to benefit from the No Leak warranty

Adhesive underlayment included in flashing kit



Shingles/shakes - ECL

- Step flashing pieces interweave with roofing material for proper water drainage.
- Additional step pieces (ZZZ 200) are required for shakes and other thick roofing materials.



Tile roofing - ECW

- Patented-sill flashing features pliable pleats that form to most types of tile.
- Side and head flashing pieces form a gutter to direct water away from the skylight.

Note: Also available for 14" & 22" curbsmount Sun Tunnel Skylight

Accessories

Skylight accessories

Instant Light Shaft


(ZZZ 234)



The VELUX Instant Light Shaft simplifies the installation of a skylight by eliminating the time and costs associated with the construction of a traditional drywall light shaft.

Sun Screen Accessory Adapter Kit


(ZZZ 232)

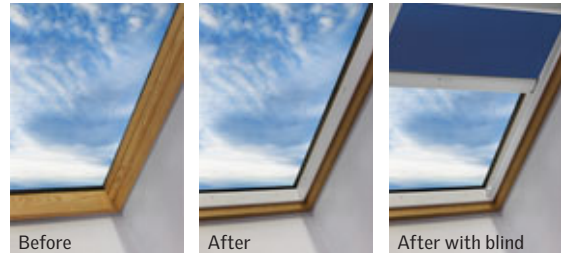

Enables prior model skylights to be fitted with any of our current model blinds. Available as a special order.
For models manufactured prior to January 1, 2010.

Replacement Kits for FS and VS

(ZZZ 238)

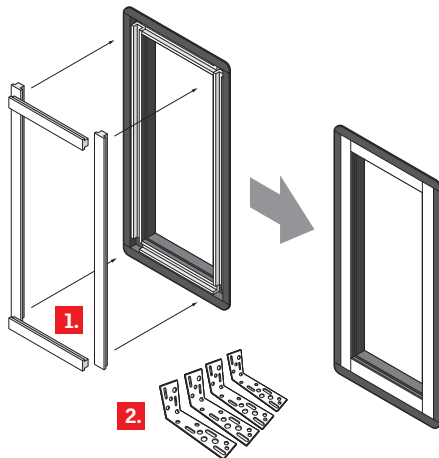

Replacement kit for all sizes of VS and most FS* skylights. Allows the installer to use a standard size VELUX VS or FS skylight on a non-standard opening while minimizing the amount of interior trim work needed.

Replacement kit (ZZZ 238) contents:

1. 4 pre-cut drywall groove filler pieces minimizes interior trim work needed.
2. 4 structural mounting brackets allows skylight to be used in applications with an oversized rough opening.

* Excluding FS A06, FS C12

Intelligent Touch Remote Control

(KLR 200)



Included with your solar or electric skylight is the Intelligent touch remote control powered by VELUX INTEGRA®. With the touch-sensitive screen and intuitive icons, programming skylights has become simpler than ever.

Size: 3 ¹¹/₁₆-in. x 3 ¹¹/₁₆-in.

Angle Adapter for Chain Operator (ZZZ 203)



Extension for manual crank handle or for the manual angle adapter to make skylights easier to operate with a manual pole.

VS Replacement Hook (ZZZ 202) VCM Replacement Hook (ZZZ 211)



Available for manual venting skylights.

Extension for Chain Operator (ZZZ 208)



Extension for manual crank handle or for the manual angle adapter to make skylights easier to operate.

VS Crank Handle (ZZZ 201) VCM Crank Handle (ZZZ 212)



A manual crank handle used to operate deck-mounted venting skylights with a chain operator. Skylights must have been installed within reach and manufactured since 2010.

Trim Kit with L Parts (ZZZ 213)



Our skylight trim kit provides a clean interior finish with no trim work required. Used when replacing older style roof windows and skylights.

Sunscreening Accessory Tray for Fixed Curb-mounted Skylights (ZZZ 199)




The sunscreening accessory tray combined with the revolutionary Pick&Click!™ system makes blind installation quick and easy for VELUX fixed, curb-mounted skylights. It has everything built-in.

Home Automation Integration Kit (KLF)



The KLF provides the means for third party sensors to send wireless commands to VELUX skylights and accessories. The interface can control up to 200 solar operated or electrically powered skylights or skylight blinds. The KLF also functions as a signal repeater that extends the operating range of standard operating controls.

Extension Rods (ZCT 300, ZMT 300, ZCT 100, ZXT 200)



6-ft. - 10-ft. rod for operation of manual skylights
(ZCT 300) Available for models: VS, VCM



3-ft. extension for ZCT 300, ZMT 300, and ZXT 200
(ZCT 100) Available for models: FS, VS, VCM, QPF



"7 hook" rod for new manual blinds
(ZXT 200) Available for models: FS, FCM, QPF, VS